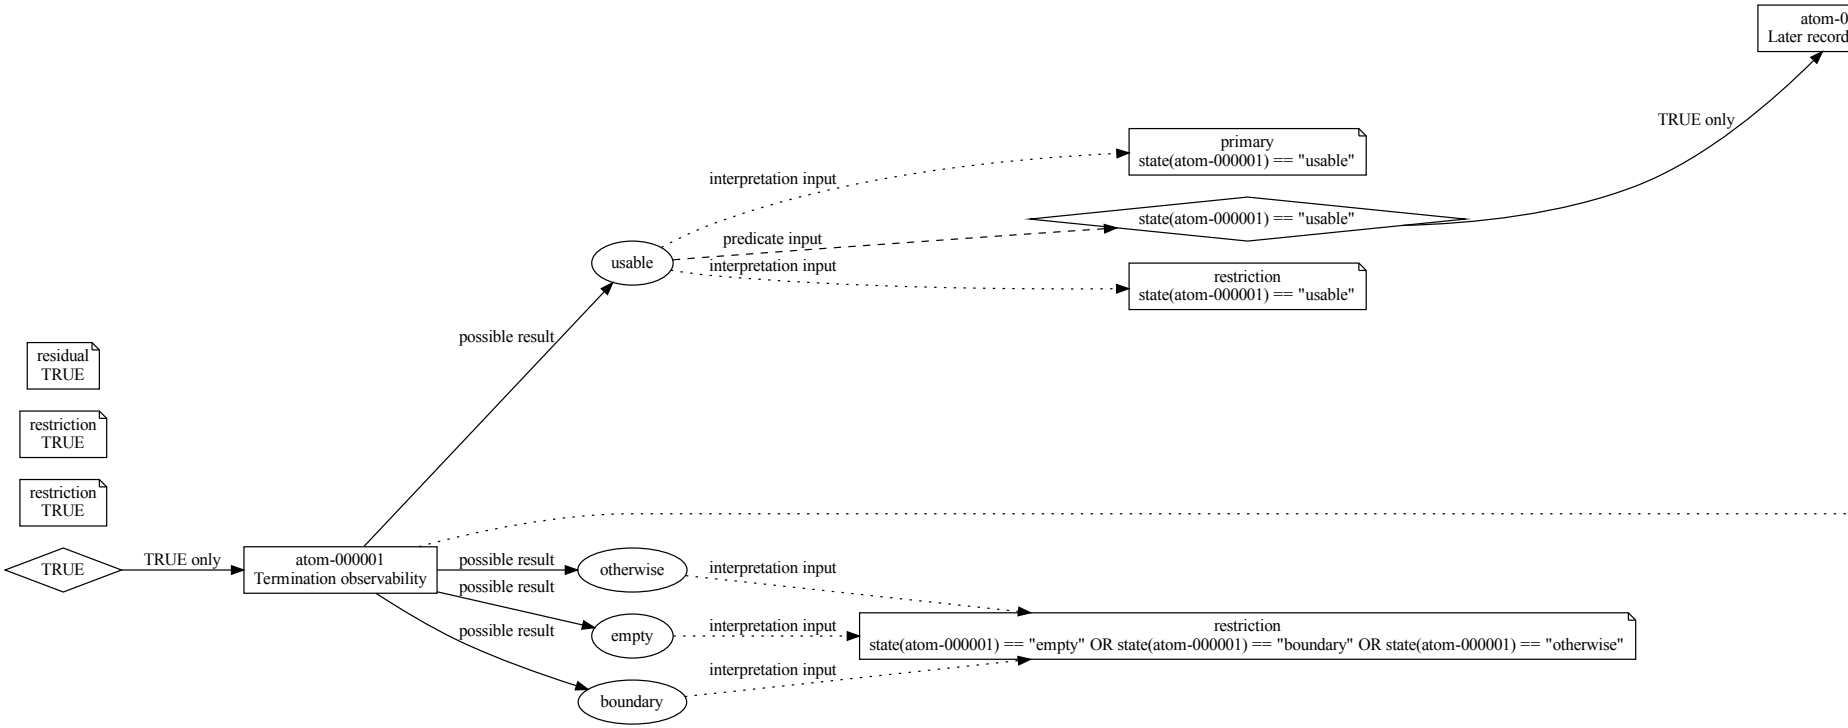

atom-0
Later record
TRUE only
primary
state(atom-000001) == "usable"
interpretation input
state(atom-000001) == "usable"
predicate input
usable
interpretation input
restriction
state(atom-000001) == "usable"
possible result
residual
TRUE
restriction
TRUE
restriction
TRUE
TRUE
TRUE only
atom-000001
Termination observability
possible result
otherwise
interpretation input
possible result
empty
interpretation input
possible result
boundary
interpretation input
restriction
state(atom-000001) == "empty" OR state(atom-000001) == "boundary" OR state(atom-000001) == "otherwise"

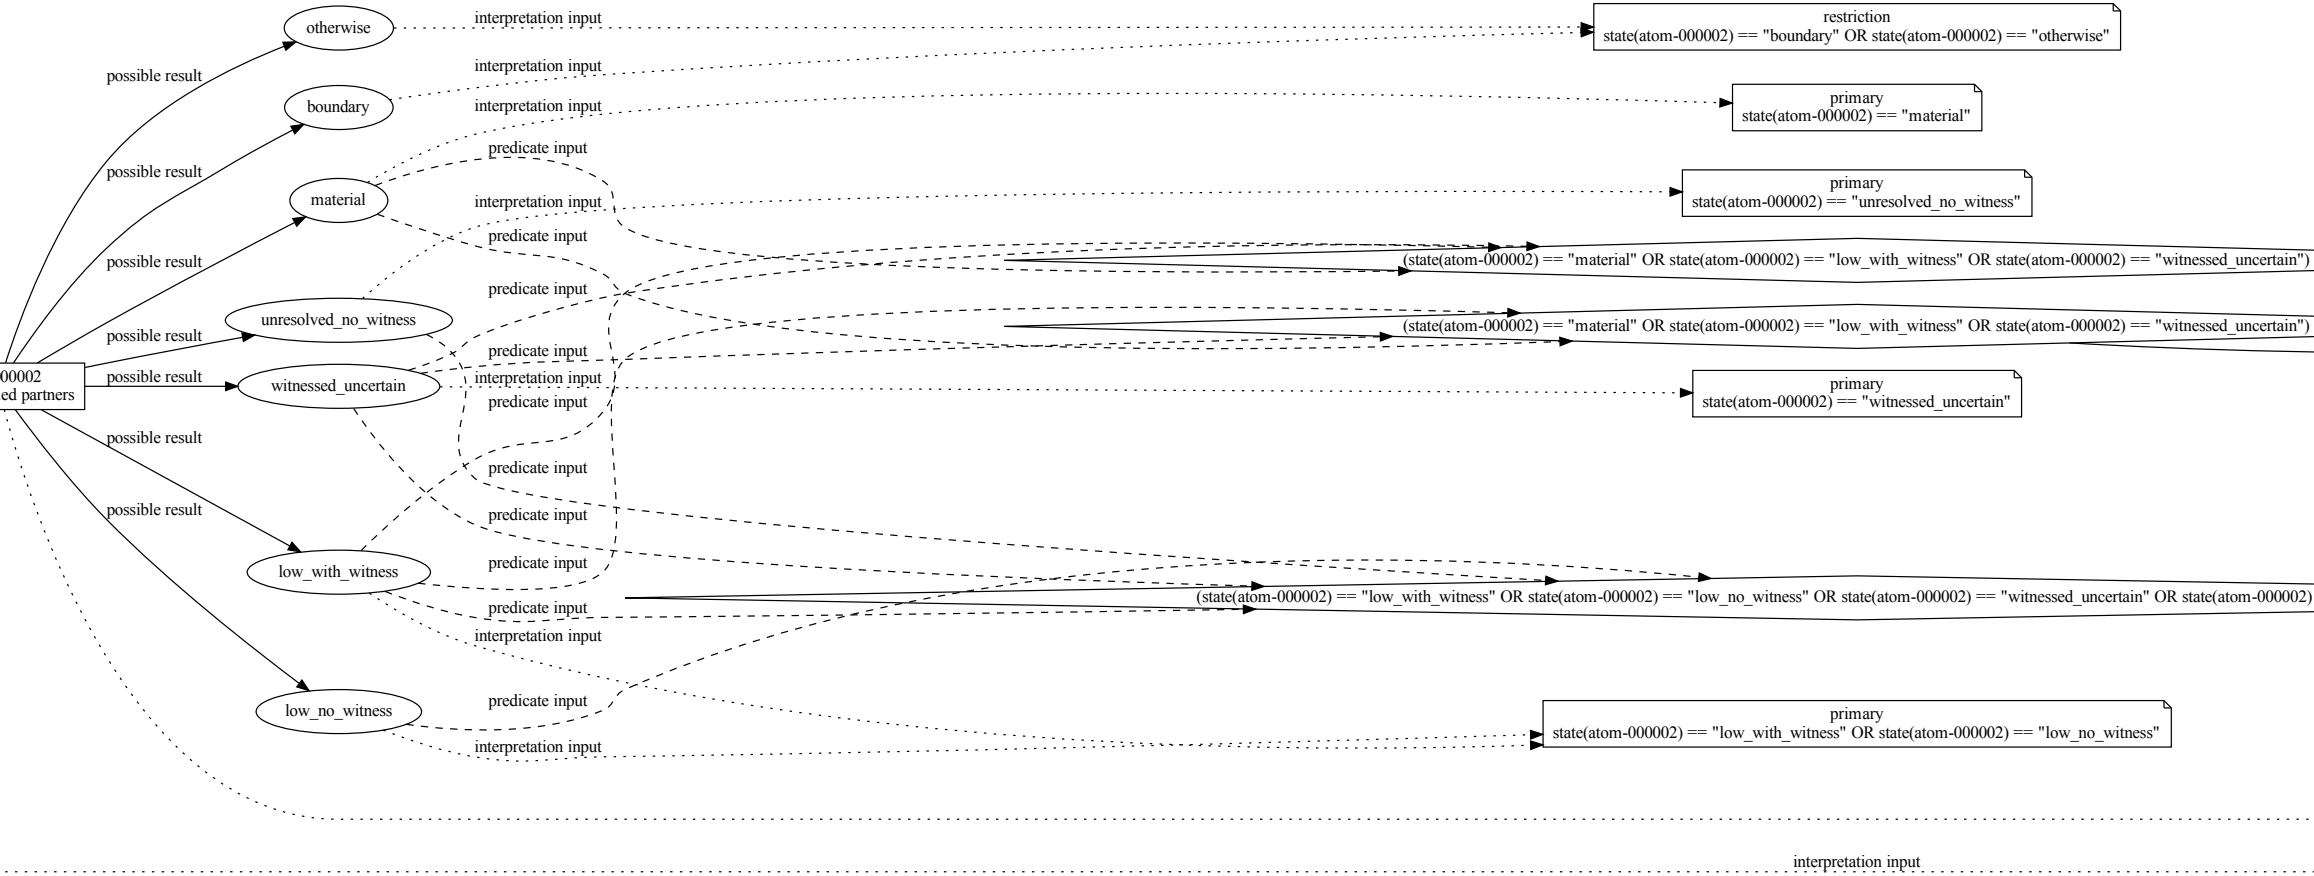
00002
ed partners
possible result
possible result
possible result
possible result
possible result
possible result
possible result
otherwise
boundary
material
unresolved_no_witness
witnessed_uncertain
low_with_witness
low_no_witness
interpretation input
interpretation input
interpretation input
interpretation input
interpretation input
interpretation input
interpretation input
interpretation input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
predicate input
restriction
state(atom-000002) == "boundary" OR state(atom-000002) == "otherwise"
primary
state(atom-000002) == "material"
primary
state(atom-000002) == "unresolved_no_witness"
(state(atom-000002) == "material" OR state(atom-000002) == "low_with_witness" OR state(atom-000002) == "witnessed_uncertain")
(state(atom-000002) == "material" OR state(atom-000002) == "low_with_witness" OR state(atom-000002) == "witnessed_uncertain")
primary
state(atom-000002) == "witnessed_uncertain"
(state(atom-000002) == "low_with_witness" OR state(atom-000002) == "low_no_witness" OR state(atom-000002) == "witnessed_uncertain" OR state(atom-000002)
primary
state(atom-000002) == "low_with_witness" OR state(atom-000002) == "low_no_witness"

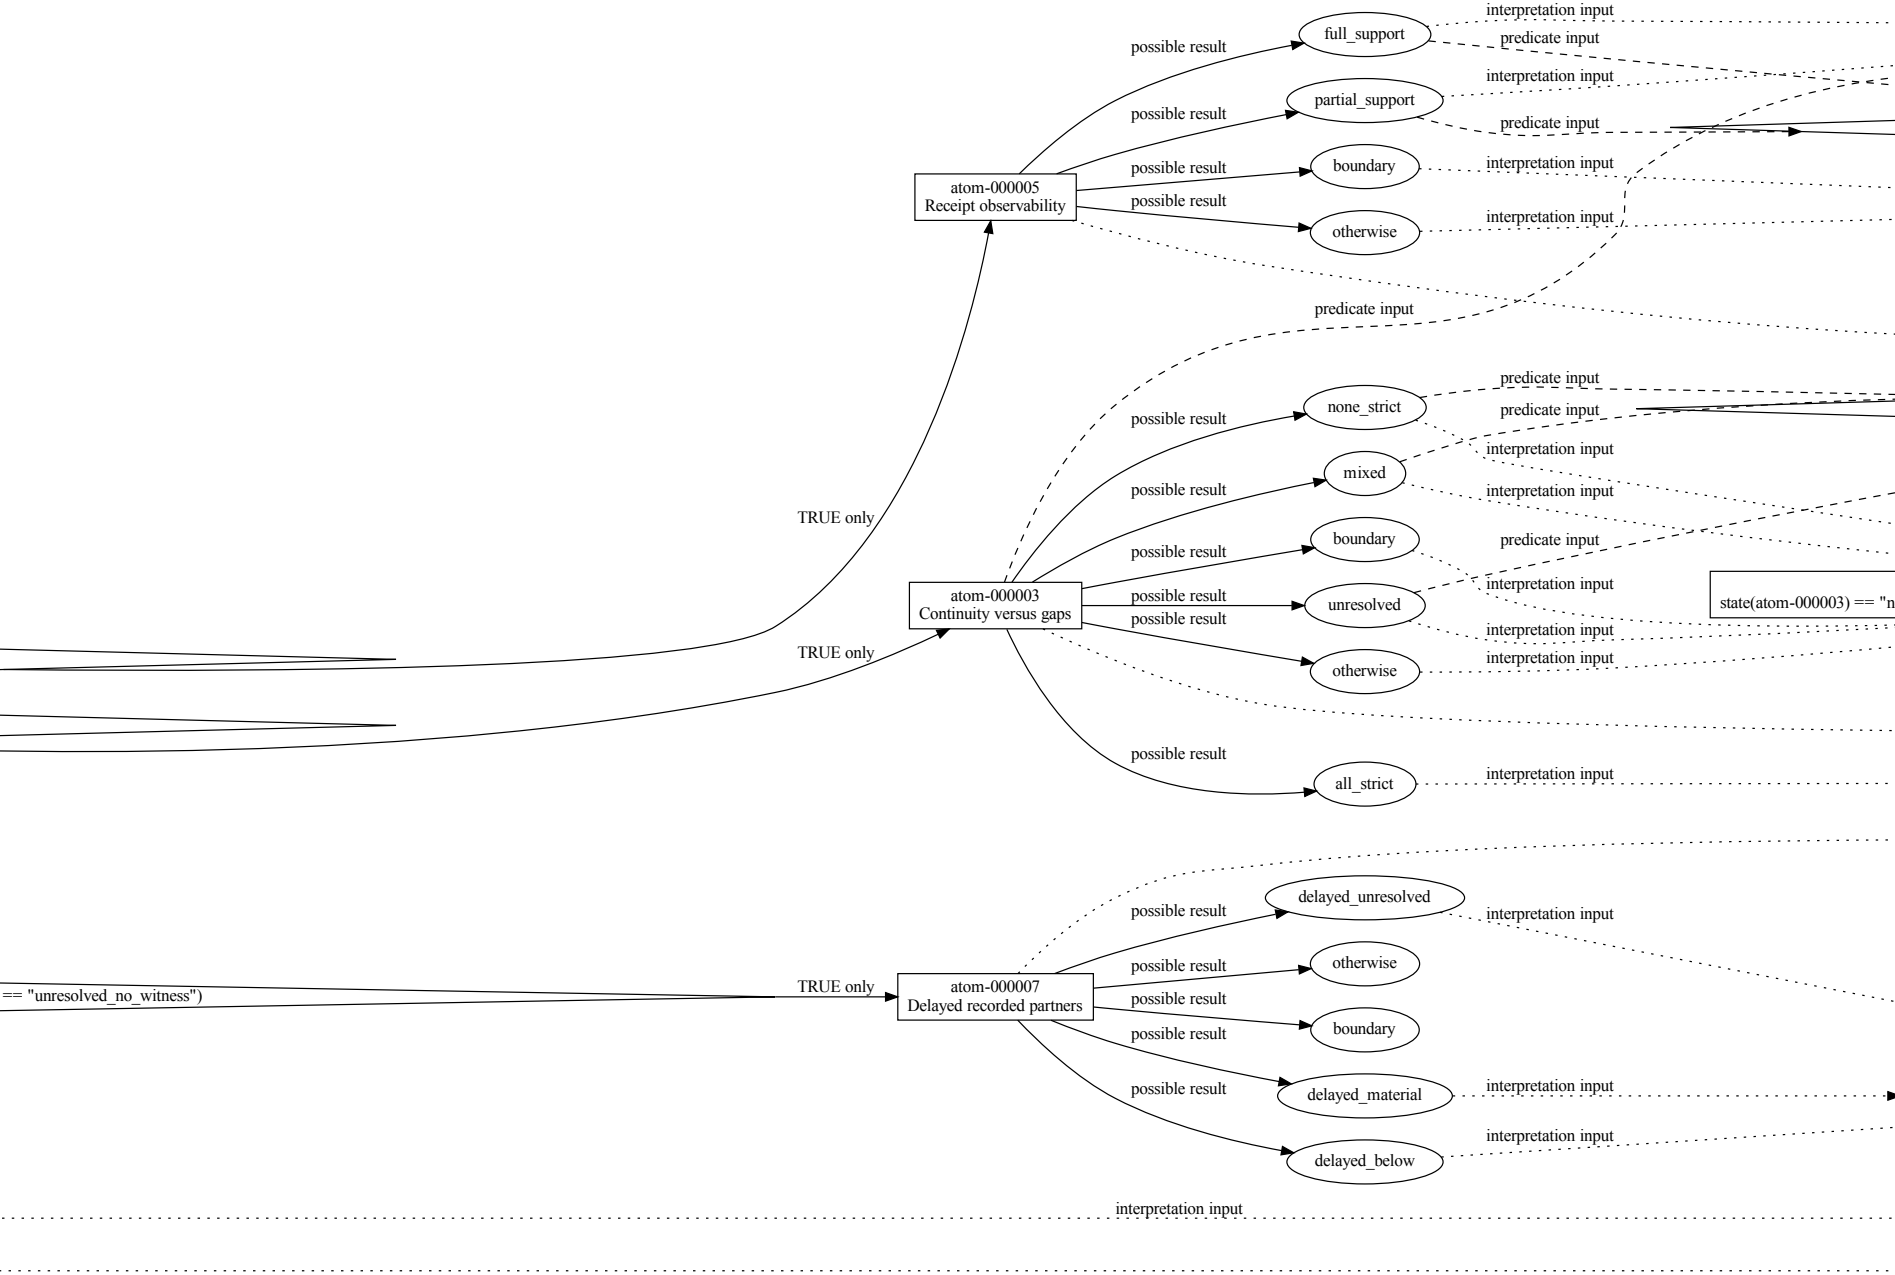
atom-000005
Receipt observability
possible result
full_support
possible result
partial_support
possible result
boundary
possible result
otherwise
interpretation input
predicate input
interpretation input
predicate input
interpretation input
interpretation input
TRUE only
predicate input
atom-000003
Continuity versus gaps
TRUE only
possible result
none_strict
possible result
mixed
possible result
boundary
possible result
unresolved
possible result
otherwise
possible result
all_strict
predicate input
predicate input
interpretation input
interpretation input
predicate input
interpretation input
interpretation input
interpretation input
interpretation input
state(atom-000003) == "n
atom-000007
Delayed recorded partners
== "unresolved_no_witness")
TRUE only
possible result
delayed_unresolved
possible result
otherwise
possible result
boundary
possible result
delayed_material
possible result
delayed_below
interpretation input
interpretation input
interpretation input
interpretation input

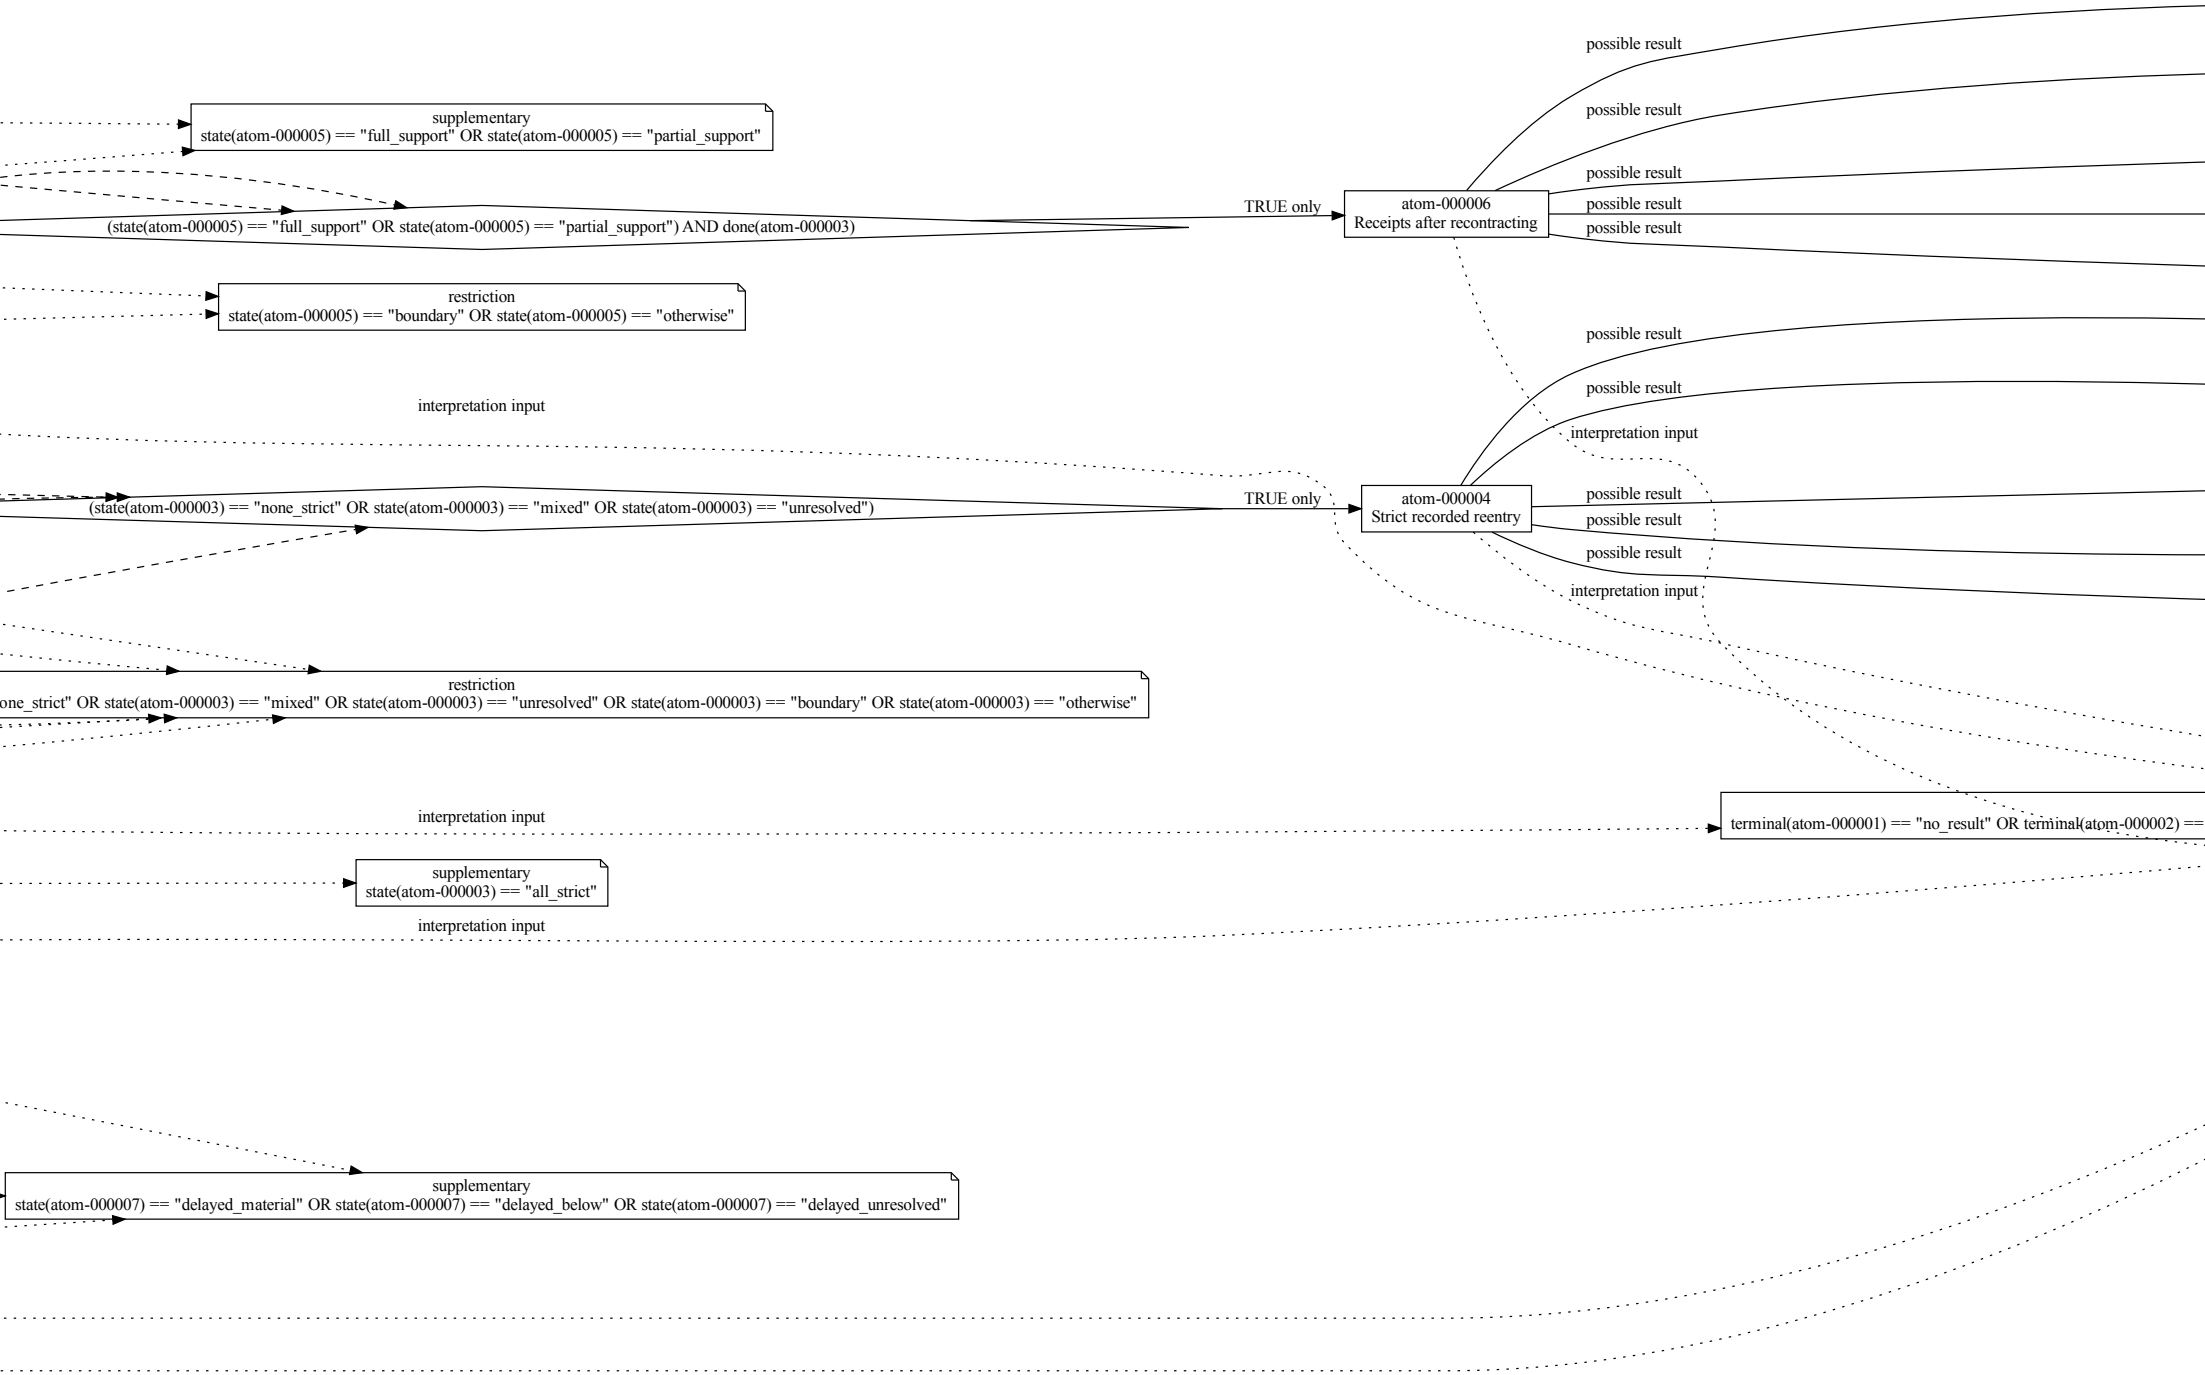
supplementary
state(atom-000005) == "full_support" OR state(atom-000005) == "partial_support"
(state(atom-000005) == "full_support" OR state(atom-000005) == "partial_support") AND done(atom-000003)
TRUE only
atom-000006
Receipts after recontracting
possible result
possible result
possible result
possible result
possible result
restriction
state(atom-000005) == "boundary" OR state(atom-000005) == "otherwise"
interpretation input
possible result
possible result
interpretation input
(state(atom-000003) == "none_strict" OR state(atom-000003) == "mixed" OR state(atom-000003) == "unresolved")
TRUE only
atom-000004
Strict recorded reentry
possible result
possible result
possible result
interpretation input
restriction
one_strict" OR state(atom-000003) == "mixed" OR state(atom-000003) == "unresolved" OR state(atom-000003) == "boundary" OR state(atom-000003) == "otherwise"
interpretation input
terminal(atom-000001) == "no_result" OR terminal(atom-000002) ==
supplementary
state(atom-000003) == "all_strict"
interpretation input
supplementary
state(atom-000007) == "delayed_material" OR state(atom-000007) == "delayed_below" OR state(atom-000007) == "delayed_unresolved"

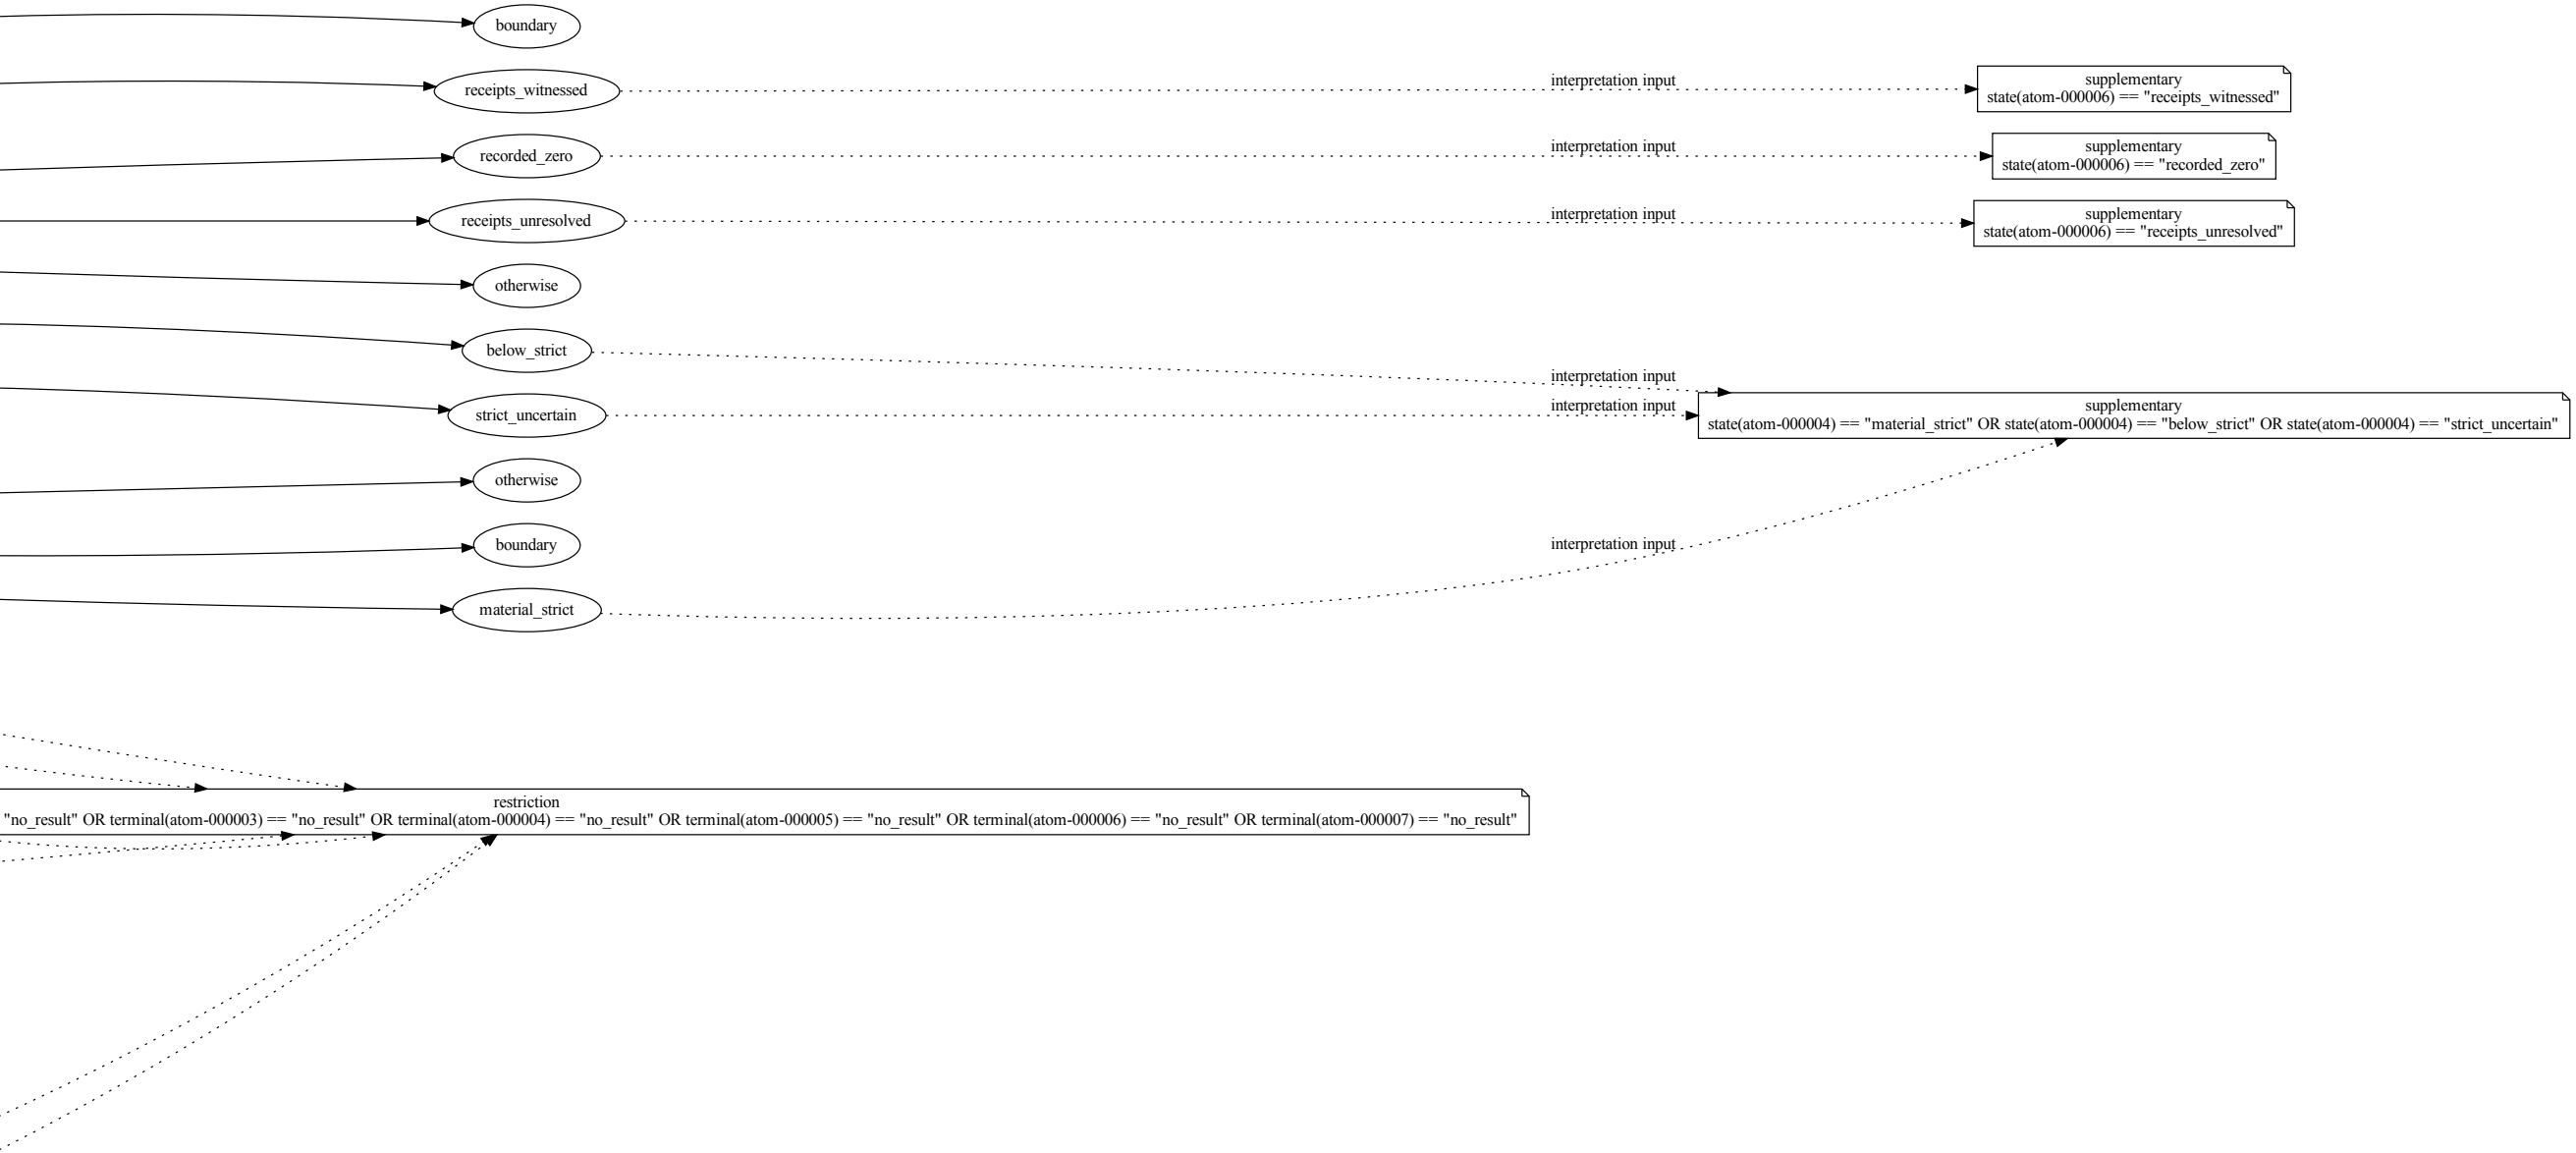
boundary
receipts_witnessed
interpretation input
supplementary
state(atom-000006) == "receipts_witnessed"
recorded_zero
interpretation input
supplementary
state(atom-000006) == "recorded_zero"
receipts_unresolved
interpretation input
supplementary
state(atom-000006) == "receipts_unresolved"
otherwise
below_strict
interpretation input
strict_uncertain
interpretation input
supplementary
state(atom-000004) == "material_strict" OR state(atom-000004) == "below_strict" OR state(atom-000004) == "strict_uncertain"
otherwise
boundary
interpretation input
material_strict
restriction
"no_result" OR terminal(atom-000003) == "no_result" OR terminal(atom-000004) == "no_result" OR terminal(atom-000005) == "no_result" OR terminal(atom-000006) == "no_result" OR terminal(atom-000007) == "no_result"